


RS AutoLoad 92

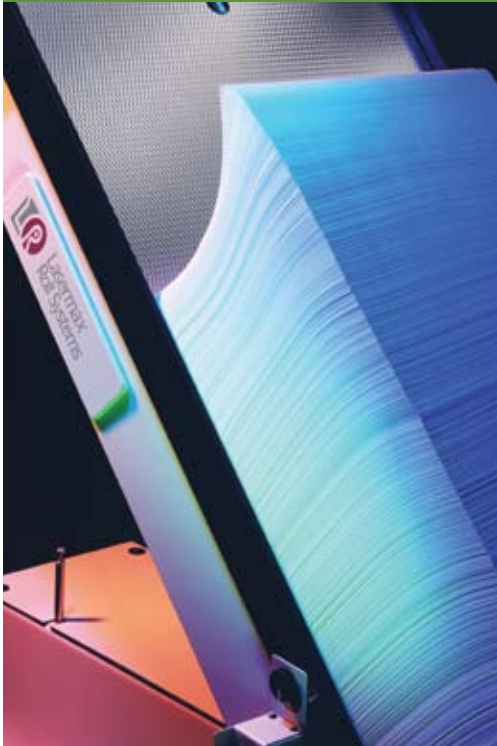

The RS AutoLoad 92 solution includes the RS52 Unwind, RS92 Folder, and RST3 AutoLoad Tilt Table.

- High capacity fanfold handling
- Pinless fanfold
- Automatic forms loading
- Automatic form size changes
- Efficient inserter feeding

Easy forms transfer

Produce efficient, high-capacity fanfold stacks from your web-fed digital printer for bulk feeding to inserters. With the RS AutoLoad™ 92, you significantly decrease operator intervention in your fanfold print-to-mail operation, while improving both printer and inserter productivity and reducing space requirements.

The RS AutoLoad 92 solution features the pinless RS92 Folder, to eliminate waste caused by pinfold tractor holes. The folder offers automated forms loading for easy start-up and automatic form size changes. The RS AutoLoad 92 creates and delivers multiple stacks of up to 10,000 forms to the StackRack™ transfer cart of your choice.

Choose from five different StackRack carts to best match your operation. Present output A-Z or Z-A as needed. StackRacks and inserter infeeds feed stacks directly to inserters for long, uninterrupted runs.

As with all of our products, the RS AutoLoad 92 solution is compatible with today's most advanced digital printers and can be adapted to meet your printing needs. Global service and around-the-clock support help ensure our reputation as the industry's reliability leader. Count on Lasertax Roll Systems to help you do more with digital print.

RS AutoLoad 92

The RS AutoLoad 92 solution consists of the RS52 Unwind, RS92 Folder, and RST3 AutoLoad Tilt Table. This system efficiently produces fanfold stacks of bills, statements, checks or other applications destined for the mail, at speeds up to 360 feet per minute.

The center-shaft driven RS52 Unwind starts the process by feeding a roll of paper into the printer for several hours of continuous, uninterrupted printing. The RS52 Unwind handles a variety of media including lightweight paper, labels and coated stocks and offers consistent, reliable feeding.

Once material is printed, the RST3 AutoLoad Tilt Table works in conjunction with the RS92 Folder to fanfold and unload stacked forms. The RS92 Folder fanfolds pinless or pinfed output from web-fed digital printers.



Efficient fanfolds.

The RS92 Folder allows automatic form size changes with an unlimited number of form lengths.

Fanfolded output accumulates and moves down the conveyor until it is transferred onto the RST3 AutoLoad Tilt Table. When full, the AutoLoad Tilt Table pivots to an upright position in either direction for A-Z or Z-A order and delivers a stack of up to 10,000 forms at a time. The stack is loaded on a StackRack cart for continuous feeding of high-speed inserters.



Transfer to AutoLoad.



Tilt and load StackRack.

All components are modular, compact and are designed to dramatically improve workflow.

Optional Capabilities



of high-speed inserters.

StackRack carts

A variety of StackRack carts are available to hold and transport up to 40,000 forms for continuous feeding

Inserter infeeds

Ensure smooth and reliable paper flow. Passive or powered models to match your inserter.

Web Vision™

Monitor print, data and workflow quality.

MICRcheck™

Verify MICR print quality in-line.

Roll carts

Easily move, store and load paper rolls.

Specifications

Performance / Media

Speed Max.	360 ft/min	1.80 m/sec
Print	Simplex, Duplex	
Feeding	Pinfed or pinless	
Paper weight	15# bond–110# index	
	55–200 gsm	
Roll diameter	4"–52"	100 mm–1320 mm
Web width	6"–19.5"	155 mm–495 mm
Form length	6"–16"	155 mm–405 mm
	12" maximum with StackRacks	
Stack Height	appr. 10,000 forms	

Electrical

Power	
Unwind, Folder	208 VAC, 1 Phase, 15A, or 200–240 VAC 50/60 Hz, 10A
Tilt Table	110–120 VAC 50/60 Hz, 2A, or 220–240 VAC 50/60 Hz, 1A

Configuration Example

